EXS3080

80A THREE-PHASE ELECTRONIC CURRENT TRANSFORMER WITH RJ45 CABLE, 2M LONG

Product designation			Electronic current transformers for EASY BRANCH system
Product type designation			EXS3080
Type			Three-phase
Current inputs			
Rated current (Ie)		A	80
Current			
IEC maximum (Imax)		A	80
IEC rated (Iref-lb)		A	15
IEC start (Ist)		mA	30
Insulations			
Rated insulation voltage Ui IEC/EN		V	600
Mechanical features			
Housing type			Polyamide
Terminals type			RJ45
Weight		g	180
Ambient conditions			
Temperature			
	Operating temperature		
		min °C	-30
		max °C	+70
	Storage temperature		
		min °C	-30
		max °C	+80
Relative humidity		%	<80
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20
Dimensions			

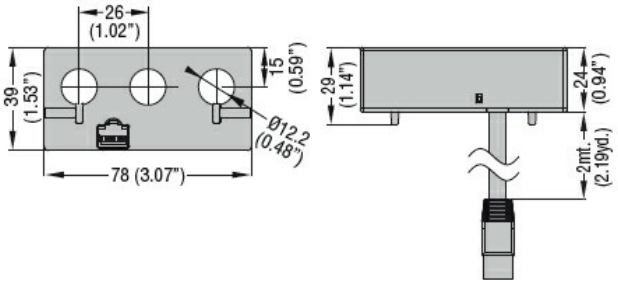

Certifications and compliance			
Compliance			
	IEC/EN/BS 61000-6-2		
	IEC/EN/BS 61000-6-4		
	IEC/EN/BS 61010-1		
Certificates			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

EXS3080

80A THREE-PHASE ELECTRONIC CURRENT TRANSFORMER WITH RJ45 CABLE, 2M LONG

CE
cETLus
EAC
UKCA

ETIM classification

ETIM 8.0	EC002475 - Current value transformer

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding